

PC-10 Computer Workstation

TOOLS REQUIRED FOR ASSEMBLY



Electric Hand Drill, Phillips Head Bit, 3/8" Socket Bit.

BEFORE ASSEMBLING THE WORKBENCH

Read through the assembly instructions to familiarize yourself with the order in which the parts are assembled. We suggest that you clear & vacuum the area where the bench is to be assembled. It is important that the bench is assembled in the same sequence as instructed.

HARDWARE

All assembly hardware is provided.

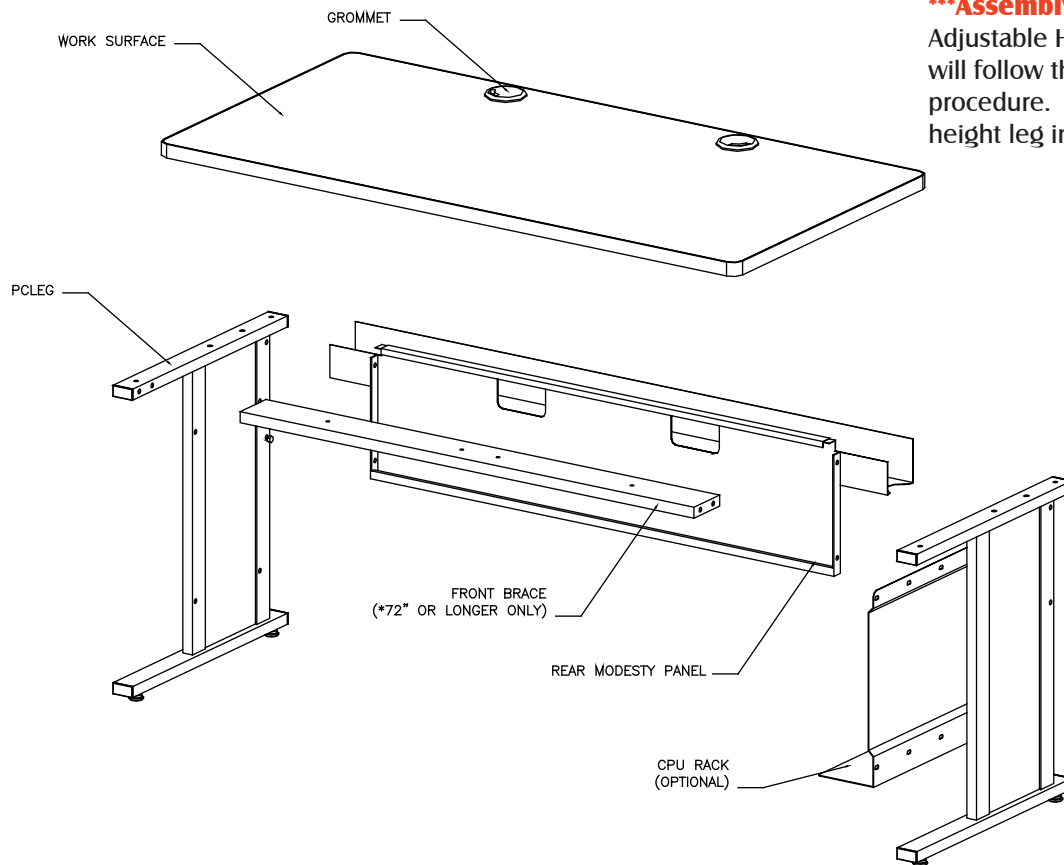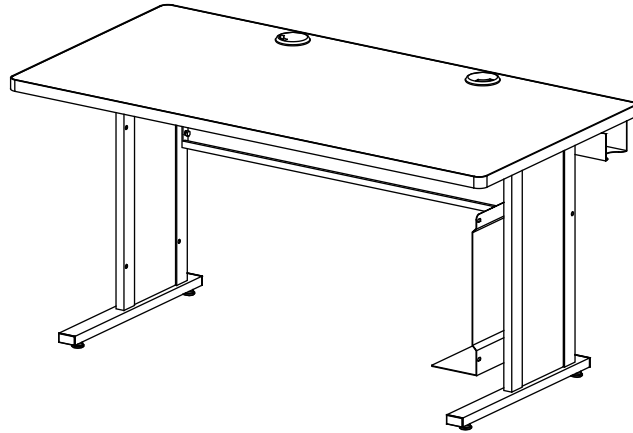

Assembly Note

Adjustable Height and Mobile Benches will follow the same basic assembly procedure. See option info for adj. height leg instructions.


STEP 1

Secure the modesty panel to a leg as shown on the right.

Use (2) 1/4"-20 x 3/4" Flange Head Bolts.



1/4-20 x 3/4"
Flange Head Bolt

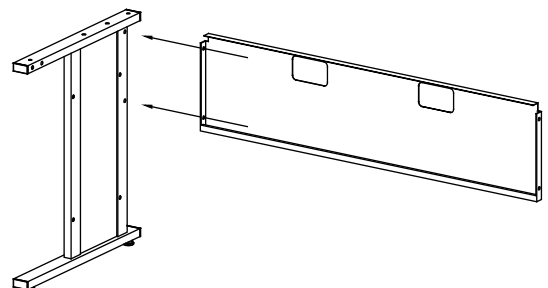


STEP 2

Next, secure the modesty panel to the opposite leg as shown on the right. If your work station is supplied with a front support brace attach it to the same leg you attached the modesty panel to in step 1. Use (2) 1/4"-20 x 3/4" Flange Head Bolts for each side of the brace and (2) for each side of the modesty.




1/4-20 x 3/4"
Flange Head Bolt

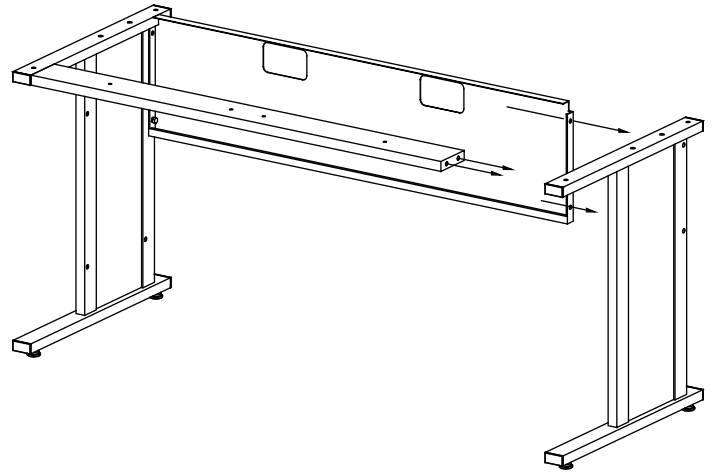

STEP 3

Hang the wire management tray from the rear modesty panel as shown. The work surface will hold the modesty panel in place.

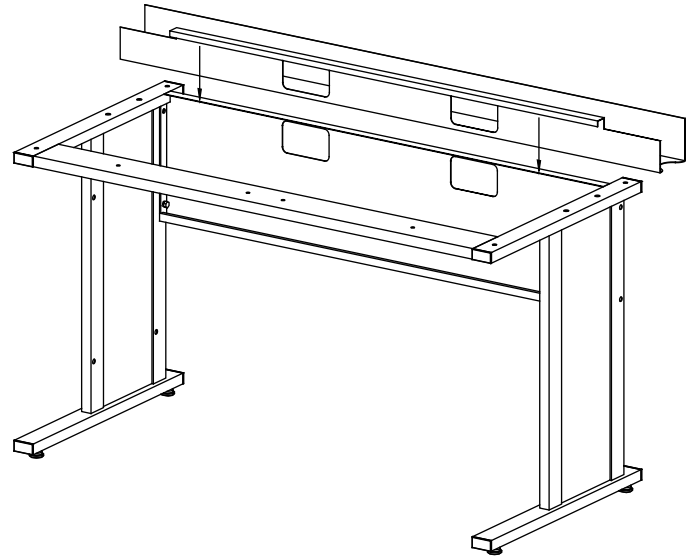

STEP 4


Place the work surface as shown on top of the assembled base. The work surface contains threaded inserts to align with the holes in the legs. Attach the work surface to the base using (4) 1/4-20 x 1 1/2 Flange head bolts. If your work station has a front brace use (4) #14x1" Lag Bolts to affix the brace to the work surface (it is recommended to pre-drill holes. All holes may not be filled)



1/4-20 x 1-1/2"
Flange Head Bolt



#14 x 1"
Lag Bolt

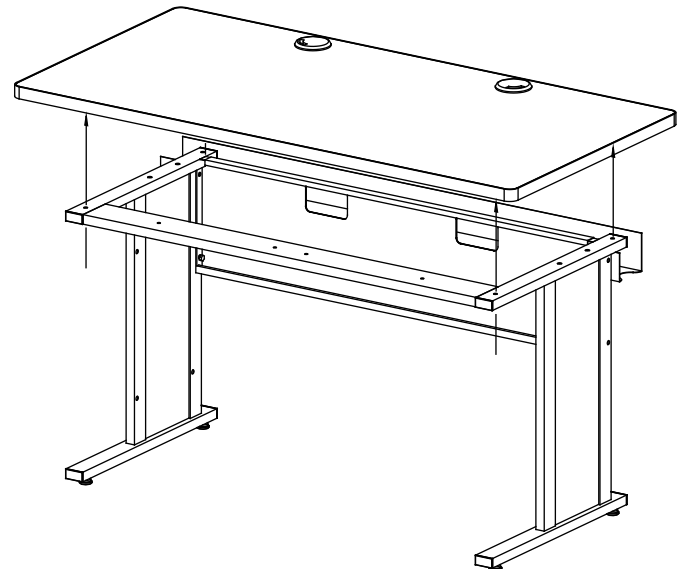



STEP 5

If you ordered the optional CPU Rack we will attach it to the leg now. Using (4) 1/4-20 x 3/4" Flange head bolts, attach the CPU Rack to the leg as shown.

Finish by installing the grommets into the holes provided in the work surface if you have not already done so.



1/4-20 x 3/4"
Flange Head Bolt

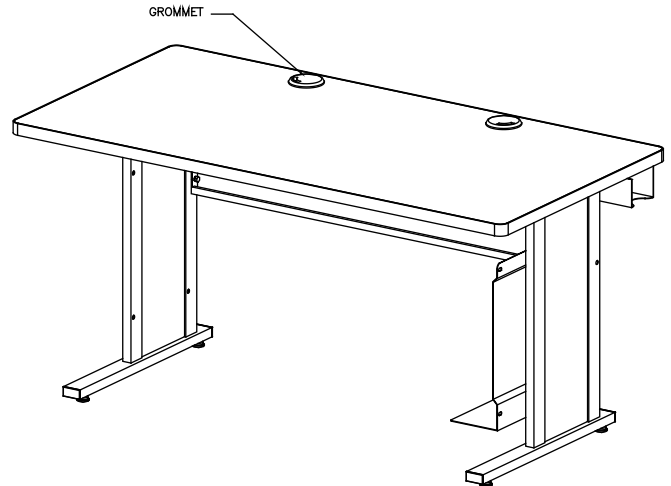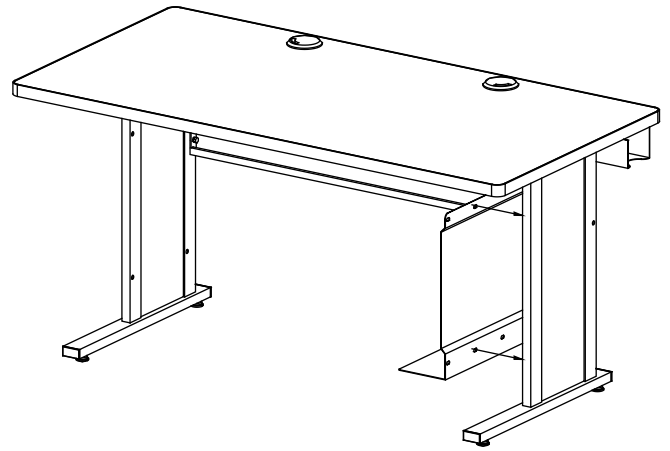

Optional Adjustable Legs

If purchased, insert the adjustable leg base into the upper section of the leg. Secure at the desired height using (4) 1/4-20 x 3/4" Flange head bolts, threaded into the pre-installed nuts.



1/4-20 x 3/4"
Flange Head Bolt

